




Fail Safe Electric Drop Bolt For Fully Frameless Glass Door

PF-500U

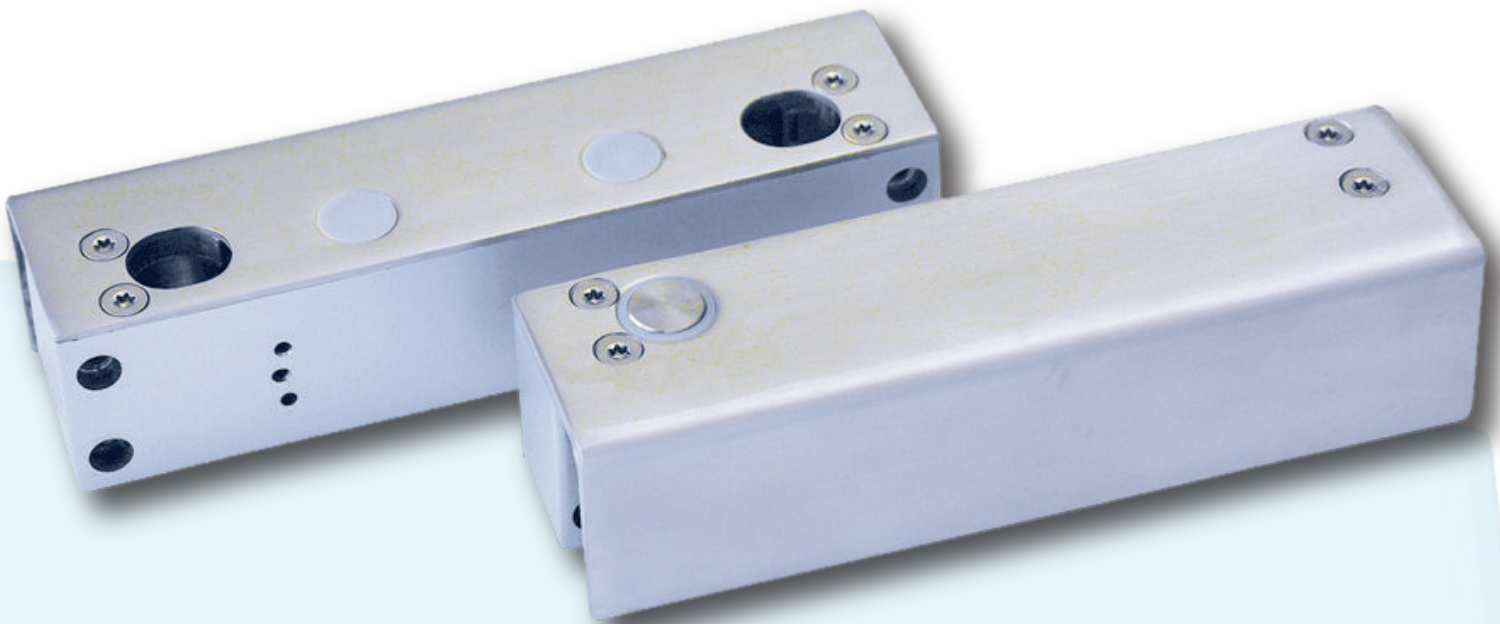

Characteristics

Fail Safe: Lock when energized

Face Plate: 150Lx39WX37H(mm)

Bolt: 17mmDIA, stainless steel 13mm throw

Voltage: 12 VDC

Start Current: 900mA

Standby Current: 120mA

Solid Bolt: polishing housing, 1000Kg Holding Force

PFC Controls

1638 NW 108th AVE, Miami FL 33172 - (800) 806-0227

www.pfccontrols.com